

## home 40 clcf

### click

**plank:** 1210 × 176,6 mm – box: 8 planks (=1,709 m<sup>2</sup>) – Pallet: 80 boxes (=136,76 m<sup>2</sup>)

**tile:** 914 × 610 mm – box: 4 tiles (=2,23 m<sup>2</sup>) – Pallet: 54 boxes (=120,43 m<sup>2</sup>)


### product specifications.

### click comfort 40

		plank	tile
Total thickness	EN ISO 24346	4 mm + 1 mm	4,5 mm + 1 mm
Thickness of the wear layer	EN ISO 24340	0,4	0,4
Total weight	EN ISO 23997	7,9 kg/m <sup>2</sup>	9,3 kg/m <sup>2</sup>
Usage classification	EN ISO 10582	23/32	23/32

### test results.

Underfloor heating	EN ISO 12524	suitable – max. 27°C (80°F)/ electrical floor heating systems: max 60 W/m <sup>2</sup>	
Castor chair	EN ISO 4918	pass	pass
Fire resistance	EN ISO 13501-1	Bfl-s1	Bfl-s1
Light fastness	EN ISO 105-B02	> 7	> 7
Thermal resistance	EN 8302	0,035 m <sup>2</sup> K/W	0,035 m <sup>2</sup> K/W
Chemical resistance	EN ISO 26987	OK	OK
Residual indentation	EN ISO 24343-1	<0,1mm	<0,1mm
Slip resistance	DIN 51130	R10	R10
	EN ISO 13893	class DS	class DS
Sound reduction: impact sound	EN ISO 717-2	20 dB	20 dB
Reflected walking sound	EPLF draft 021029-3-2004	33 SONE (57% sound reduction)	33 SONE (57% sound reduction)
Dimensional stability	EN ISO 23999	< 0,15 %	< 0,15 %
Residential warranty		20 y	20 y
Commercial warranty		5 y	5 y
Formaldehyde	EN ISO 717-1	E1	E1
Lock strength	EN ISO 10582	> 4 kN/m	> 4 kN/m




# spirit.

## home 40 clcf

### Underlay


Material		IXPE
Thickness		1 mm
Compressive strength	EN 826	117 kPa
Punctual conformability	CEN TS 16354: 12-2013	0.52mm
Water absorption	EN 12087	0.6%



# home 40 clcf

# spirit.

**spirit.**  
**HOME 40 click comfort**

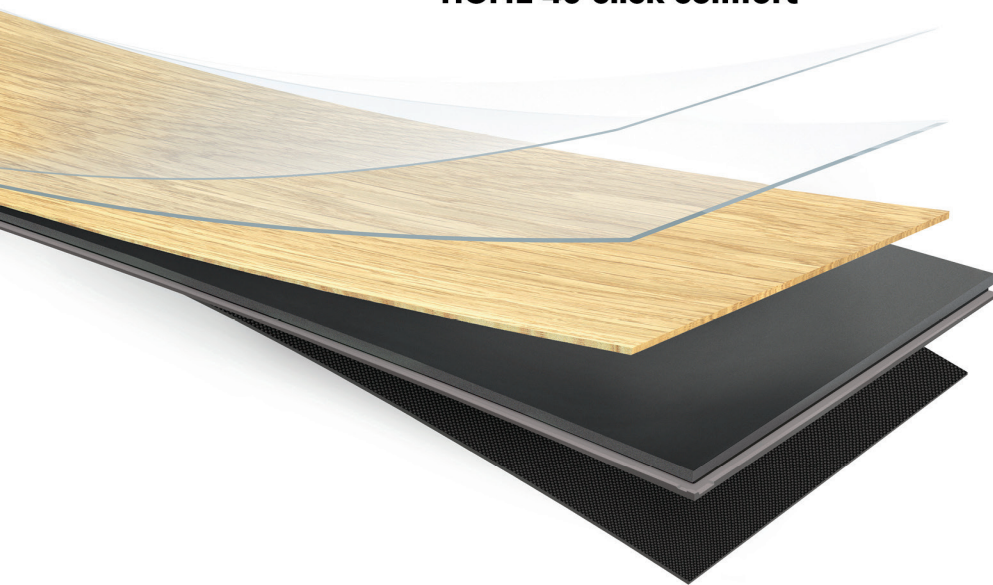

- 1 Protective PU lacquer
- 2 Wear layer 0,4 mm
- 3 Decorative printfilm
- 4 Rigid board
- 5 Integrated underfloor (1 mm)

Total thickness: 4+1 mm (planks)

Total thickness: 4.5+1 mm (tiles)